


LOSPA SB



Your KRAIBURG dealer:

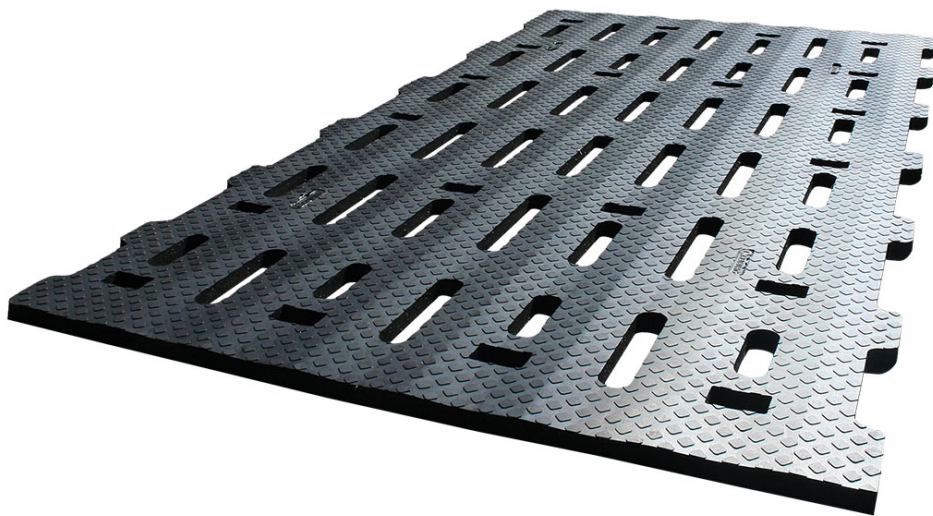

reinforced, curved surface with square imprinting



stable groove profile on lower side for high stress



optimised fastening system: reinforced rubber peg with surrounding rim - flush with the mat

Rubber cover for common longitudinal and transverse slats in bull fattening or for heifers

- curved surface with approx. 5 % slope towards the slit
 - facilitates the draining of liquids and dries faster
 - increases cleanliness
 - reduces ammonia emissions
- improved surefootedness
 - reduces the risk of injuries and animal losses
- increased lying comfort and improved heat insulation
- with bull fattening: enhances weight gain and shortens fattening period
- high dimensional stability and long durability
- easy to clean and disinfect
- simple installation
- suitable for new construction, as well as for renovation

Dimensions:

Individually tailor-made

The mats are generally dimensioned according to the guidelines established by our specialists. The slatted floor must be suited for covering with KRAIBURG mats.*

thickness: 23 mm

width x length: tailor-made

Prerequisites for slatted floors:

- slit width: starting at 30 mm
- The slats have to be the same width.

IMPORTANT: Balanced feeding is a requirement for clean animals.

For young cattle up to 250 kg animal weight (or up to 350 kg, if the animals are kept in the same pen for the whole breeding period) **KURA SB** » or **KURA S** » can be used.

Installation:

easy and fast installation with corresponding, patented rubber pegs *

* Please take notice of the corresponding KRAIBURG specifications and installation instructions with useful advice and tips.

>>>The products presented here should only be used for the mentioned applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Legal basis is the German version of the document.



LOSPA SB in practice

Tolerances:

thickness:

+3/-2 mm

The tolerances also apply within the mat and when installed.

length + width:

+/- 1.5 % (DIN ISO 3302-1 tolerance class M4)